


ARE TO BE USED TO SIZE THE FOOTINGS BELOW FOR COLUMN SUPPORT PIERS. REFER TO TABLES TALLATION MANUAL FOR LOAD ON FRAME PIERES THAT DO NOT REQUIRE PERIMETER BLOCKING. AND 7c IN THE INSTALLATION MANUAL FOR LOAD TINGS THAT REQUIRE PERIMETER BLOCKING. AND 10a TO DETERMINE FOOTING SIZE FOR ALL

OR PIER CONFIGURATION AND MAXIMUM S. CROSS REFERENCE THE PIER HEIGHT WITH THE E FLOOR HEIGHT LISTED IN THE FRAME TIEDOWN 9, AND 20). N IS FOR STANDARD PRODUCT ONLY. CONTACT SPECIFICATIONS OF OPTIONS ORDERED. TIONS IDENTIFIED ARE APPROXIMATE. NG FOR FRAME SUPPORT PIERS FOR 8" I-BEAMS BEAMS ARE 10 FEET.

20 psf Roof Live Load			
Column Pier #	Distance from Hitch Feet	Inches	Pier Load (lbs)
1	14	6	3467
2	29	10	3467

SERVICE DROP LEGEND	PIER LEGEND
= ELECTRICAL DROP	= SUPPORT UNDER MATING OPENING
= WATER INLET	= SUPPORT AT MATING COLUMN
= DWV PLUMBING DROP	= SUPPORT UNDER MATING WALL
= GAS INLET	= PIER PORCH/RECESSED ENTRY
	= PIER MAIN BEAM
	= PIER PERIMETER
	= TIE-DOWN SUPPORT (QTY PER TBL M, SEE DETAIL D-6 IN FOUND. PKG.)

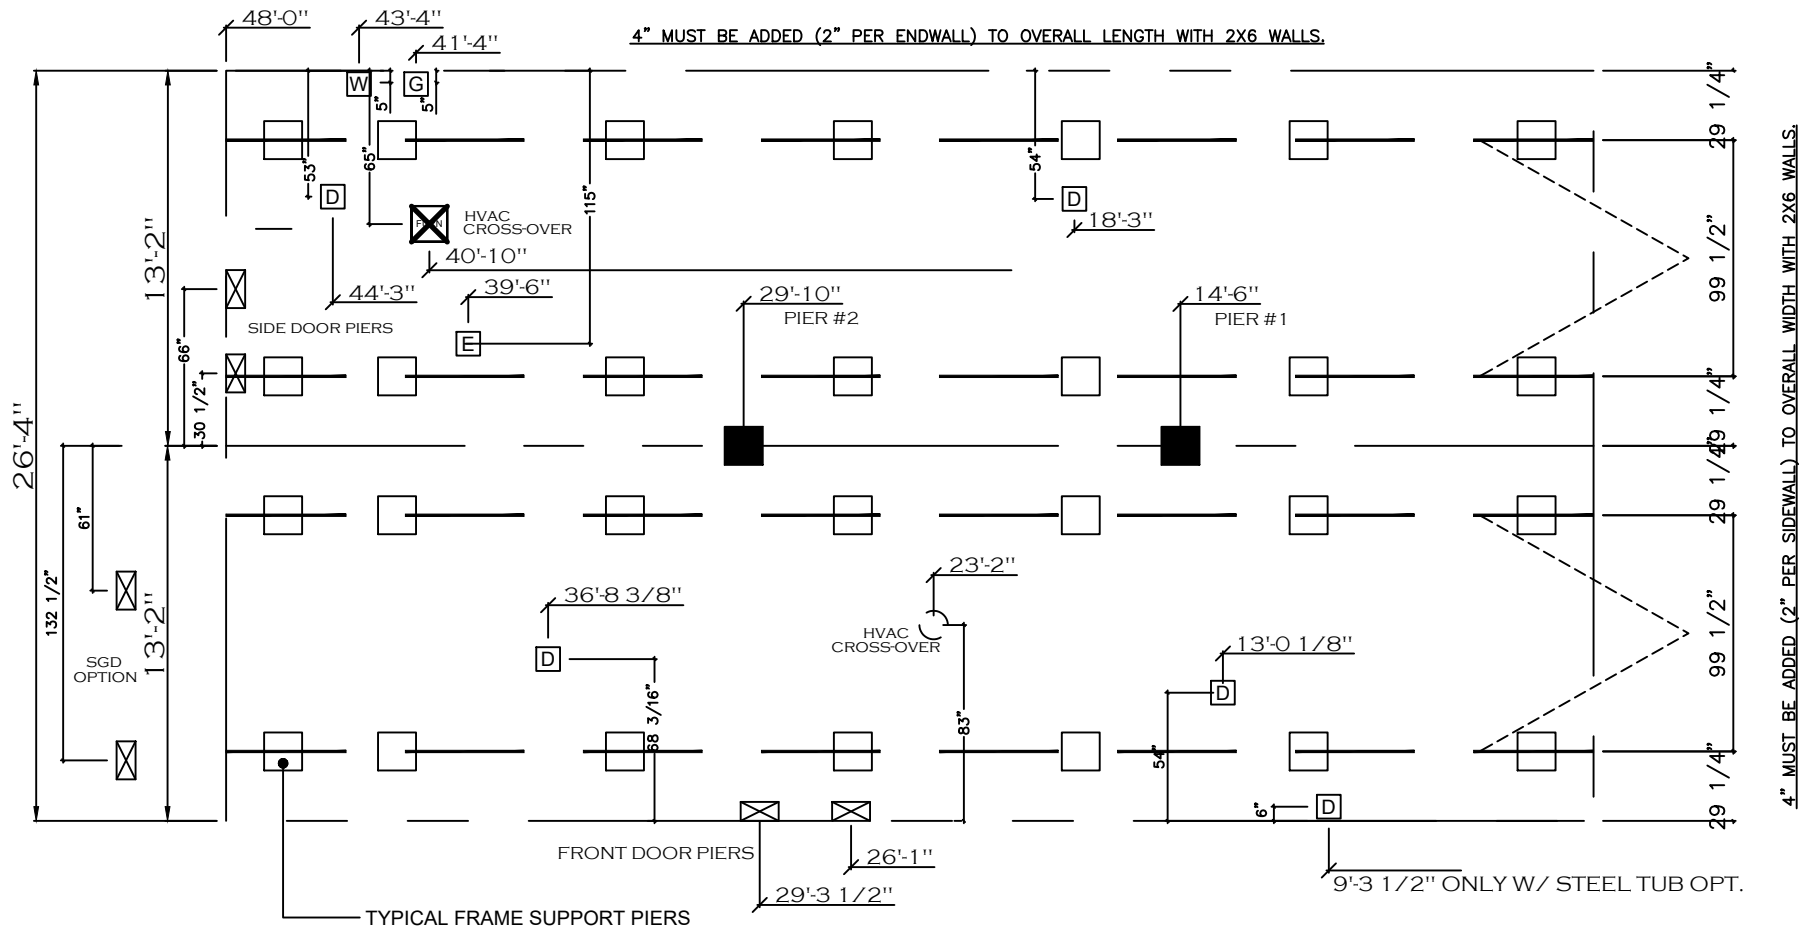

20 lb ROOF LOAD SIDEWALL OPENING PIER LOAD 28' BOX WIDTH	SIDEWALL OPENING (FT) REQUIRED PIER LOAD (LBS)					
	3	4	5	6	8	10
	1175	1330	1485	1640	1950	2260

*FOR 30 lb & 40 lb ROOF LOAD REFER TO TABLES 7b & 7c IN THE INSTALLATION MANUAL.

SHEET: MP	PIER SET	Clayton - 934 1420 Mountain Rd, Andersonville, TN 37705 PH: 865.494.7800 FAX: 865.494.0243	HILBORN, WERNER, CARTER, AND ASSOCIATES, INC. 1627 SOUTH MYRTLE AVE. CLEARWATER, FL. 33756	DRAWING #: 34M194	MODEL: THE FUSION C (28'X48')	STD PLAN "CONDITIONED": 1,264 FT ²
				MODEL #: FSN28483C	SERIES: FUSION SERIES	REV. BY:
				DATE: 03/02/2021	SCALE: N.T.S.	PRODUCT DESIGNER: DANIEL C. SHELDON
						REV. DATE: