GENERAL NOTES:

- 1. PIER LOADS SHOWN ARE TO BE USED TO SIZE THE FOOTINGS BELOW THE MARRIAGEWALL FOR COLUMN SUPPORT PIERS. REFER TO TABLES 6b AND 6c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS FOR HOMES THAT DO NOT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 7b AND 7c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS THAT REQUIRE PERIMETER BLOCKING, REFER TO TABLES 10 AND 10a TO DETERMINE FOOTING SIZE FOR ALL PIERS.
- REFER TO TABLE 9 FOR PIER CONFIGURATION AND MAXIMUM ALLOWABLE HEIGHTS. CROSS REFERENCE THE PIER HEIGHT WITH THE MAXIMUM ALLOWABLE FLOOR HEIGHT LISTED IN THE FRAME TIEDOWN CHARTS (TABLE 18, 19, AND 20).
- FLOOR WIDTH SHOWN IS FOR STANDARD PRODUCT ONLY. CONTACT THE MFG PLANT FOR SPECIFICATIONS OF OPTIONS
- SERVICE DROP LOCATIONS IDENTIFIED ARE APPROXIMATE.
- THE MAXIMUM SPACING FOR FRAME SUPPORT PIERS FOR 8" I-BEAMS IS 8 FEET, 10" & 12" I-BEAMS ARE 10 FEET.

PIER

PRINT DATE: 7/13/2023

PIER SET

| 20 psf Roof Live Load | | | | | |
|-----------------------|------------|-----------|--|--|--|
| Column | Distance | Pier Load | | | |
| Pier# | from Hitch | (lbs) | | | |
| 1 | 16.333 | 4087 | | | |
| 2 | 35 | 4087 | | | |
| 3 | 45.417 | 2375 | | | |
| 4 | 55.417 | 2375 | | | |

SERVICE DROP LEGEND

M.V.P.

PRODUCT DESIGNER:

DATE: 07/12/2023 | SCALE:


- E = ELECTRICAL DROP
- W = WATER INLET
- D = DWV PLUMBING DROP
- G = GAS INLET

| | PIER | R LEGEND | | |
|-----|---------|----------|--------|---------|
| _ = | SUPPORT | UNDER | MATING | OPENING |

- SUPPORT AT MATING COLUMN
- SUPPORT UNDER MATING WALL = PIER PORCH/RECESSED ENTRY
- = PIER MAIN BEAM
- = PIER PERIMETER
- = TIE-DOWN SUPPORT (QTY PER TBL M, SEE DETAIL D-6 IN FOUND. PKG.)

REV. DATE:

BRIAN K. RIFFEY

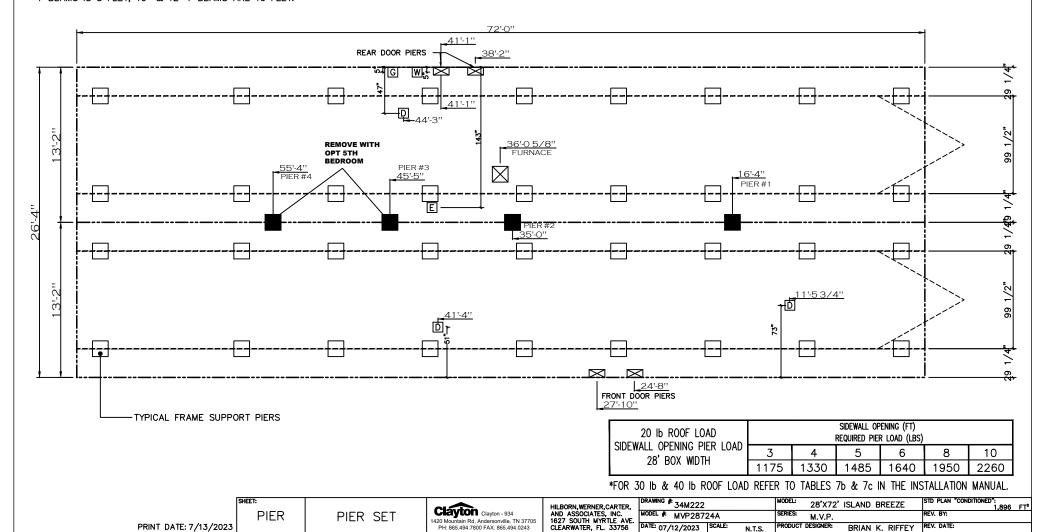

1420 Mountain Rd, Andersonville, TN 37705 PH: 865.494.7800 FAX: 865.494.0243